



# Gyptone ceilings 2.3.3 Plank

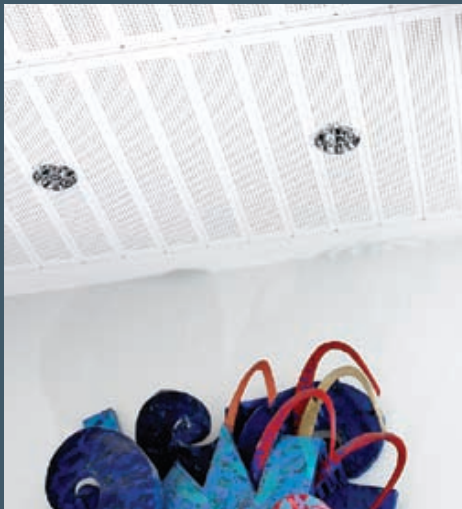

**Gyptone®**

Reflecting everyday life

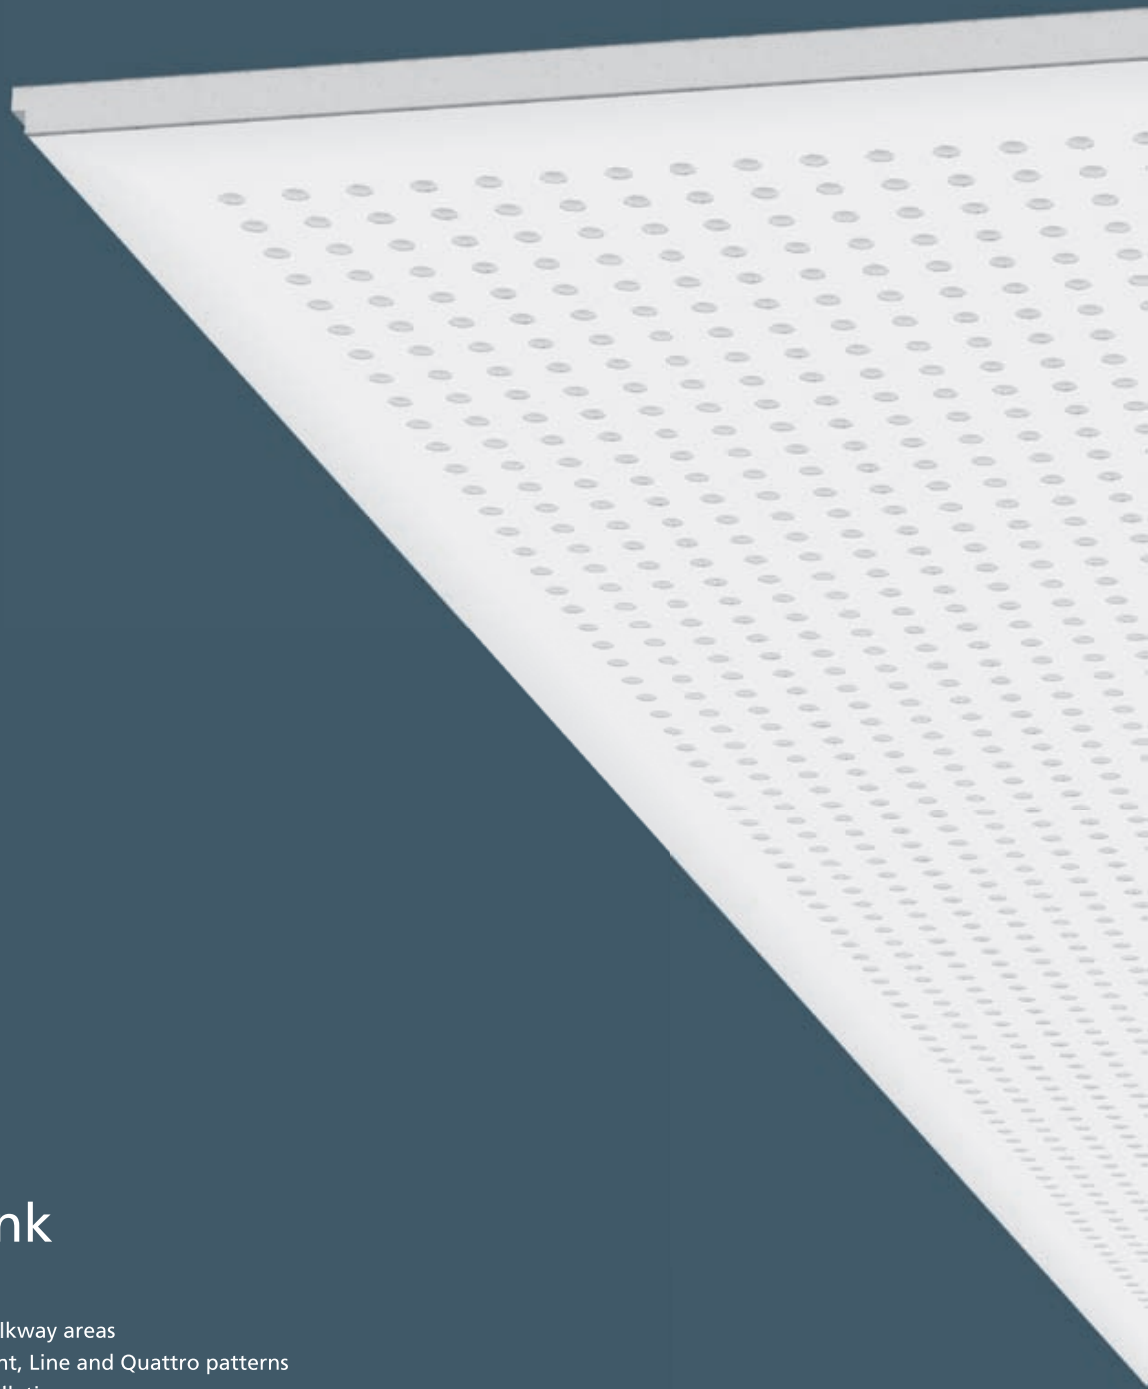

## Gyptone Plank

- Solution for corridors and walkway areas
- Plank is available in Base, Point, Line and Quattro patterns
- Easy access to concealed installations



# Gyptone Plank

The product range for Gyptone Plank comprises four standard patterns based on the Line, Point, Quattro and Base pattern types. Plank has recessed long edges and is fixed to reinforced, exposed T-15 sections without hangers.


The fact that Gyptone Plank and its supporting sections can be easily demounted makes it suitable for corridors where easy access to installations is required.

The planks have perforations which together with the acoustic backing tissue give good acoustic properties.



## Acoustics

Practical absorption coefficient  $\alpha_p$   
(Gyptone Plank, Point)

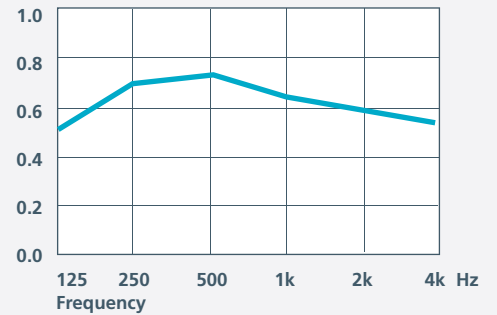




■ 0.55 0.70 0.75 0.65 0.60 0.55  
■ Construction height 200 mm

These measurements meet the requirements of ISO 354. All measurements were carried out on standard planks with acoustic tissue laminated on the back.

The construction height specifies the distance between the undersides of the suspended ceiling and the existing construction.

The board's sound absorption is affected by the construction height.

Edges	Modular size (mm)	Thickness (mm)	Grid systems	Fixing/Surface Treatment
E15 Long edge 	300 x 1800 300 x 2100 300 x 2400	12.5	Exposed suspended T-15 grid system Long edge  Short edge 	Demountable/Painted

#### Other Plank pattern possibilities



#### Point 15

Hole size: Dia. 6.5 mm, cc 15 mm  
Perforated area: 11%

Modular size: 300 x 1800 mm,  
300 x 2100 mm and 300 x 2400 mm

## Design and technical data

#### Product description

Gyptone Plank is made out of Gyproc plasterboard. The holes in Line, Point and Quattro are punched in the planks with great precision. The planks are backed with an acoustic tissue.

#### Fixing

Gyptone Plank is designed for the reinforced T-15 grid system and the planks are demountable.

#### Construction height


The smallest possible construction height is 200 mm including the plasterboard.

#### Load

Gyptone Plank must not be subjected to additional load. Light fittings and the like other similar items must be separately hung from wires or fixed to other load-bearing structures.

#### Surface

Gyptone Plank is supplied pre-painted white NCS 0500.

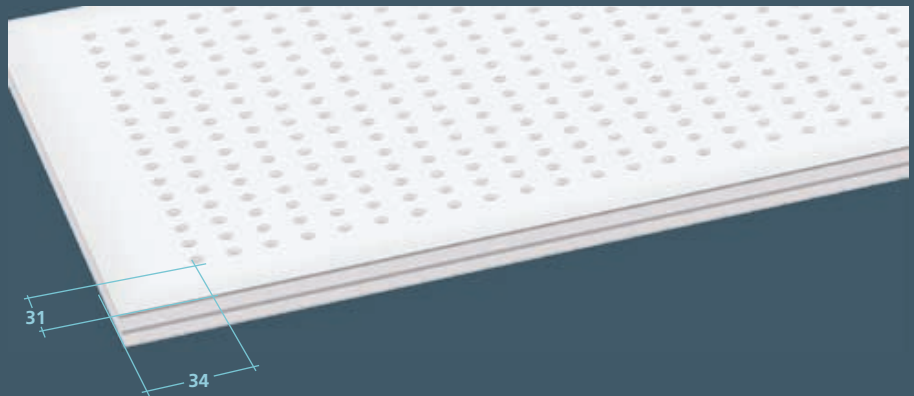

#### Fire

A2-s1,d0.

#### Edge

E15/A.

#### Gloss and light reflection

Gloss value 5-9 according to ISO 2813.  
Light reflection 70-75% for perforated and 82% for unperforated Plank.

#### Dimensional stability

Gyptone Plank should be installed and used in corridors with a relative humidity not exceeding 70% for prolonged periods.

#### Dimensions

Modular size 300 x 1800 mm, 300 x 2100 mm and 300 x 2400 mm.  
Thickness 12.5 mm.

#### Weight

Line, Point and Quattro approx. 8 kg/m<sup>2</sup>.  
Base 9 kg/m<sup>2</sup>.

#### Cleaning

Gyptone Plank can be cleaned with a damp cloth. Most standard cleaning agents can be used.

#### Maintenance

Repainting must be done with a roller. The planks must not be spray-painted, as this impairs sound absorption.

More information can be found on [www.gyptone.com](http://www.gyptone.com)





# www.gyptone.com

Gyptone.com is not just a home page. Here you can find all Gyptone products "live" – see [www.gyptone.com](http://www.gyptone.com) – choose the 3D product gallery and you will enter a 3D universe where all our products can be turned around and over, put together with different systems and displayed exactly the way you want them in your project.



Gyproc A/S  
Hareskovvej 12  
DK-4400 Kalundborg  
Denmark  
Tel.: +45 59 57 03 30  
Fax: +45 59 57 03 01  
e-mail: [info@gyproc.com](mailto:info@gyproc.com)  
[www.gyptone.com](http://www.gyptone.com)

October 2007

